




The standing seam mount is already mounted to suit plates laid from the right. If this is not the case, the jaws have to be fastened and mounted to the other side. The jaws must be the same side as the plates' overlap. Assemble the standing seam mount on the fold.

Tighten the nuts to at least **40Nm**

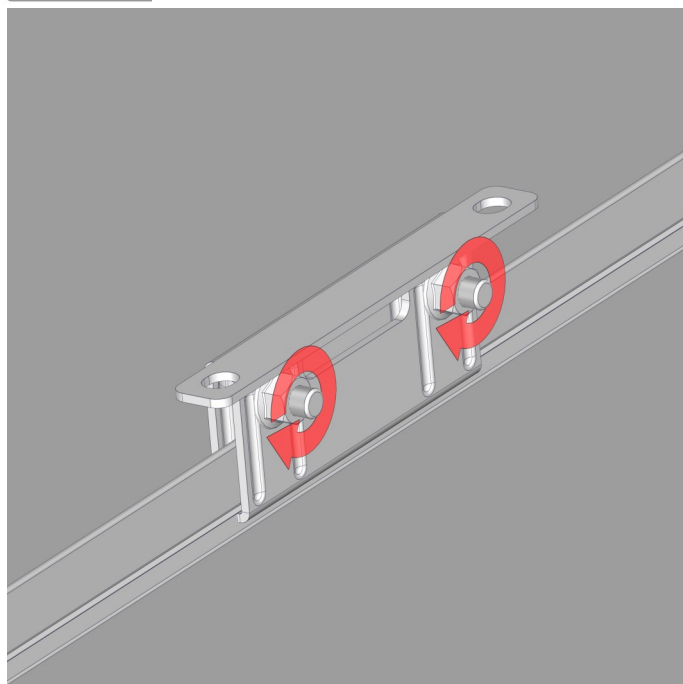

Make sure the jaws fasten under the seam edge

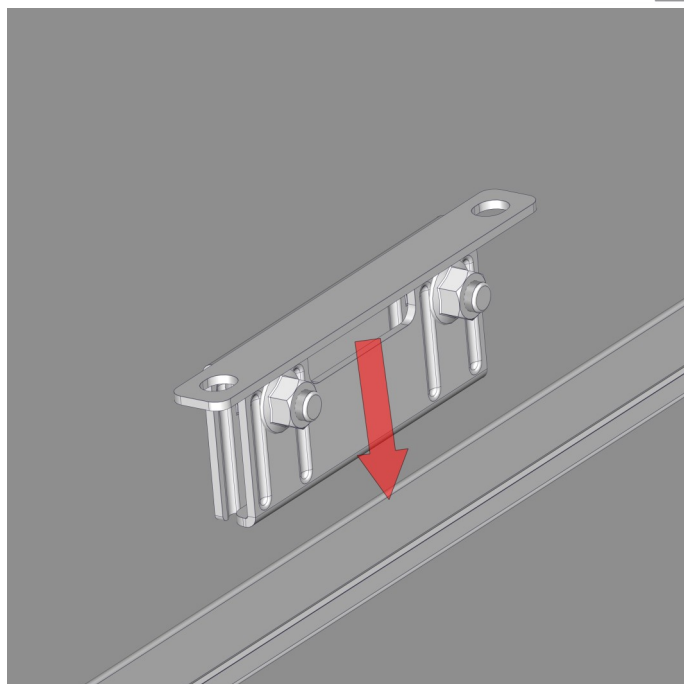

Assemble the standing seam mount on the fold

Tighten the nuts to at least **40Nm**



Make sure the jaws fasten under the seam edge