


Drop Down ladder


	Part	Part. no.
1	Cat ladder	ST1540/ST1840/ST2440
2	Joint plate, ladder	SK2500
3	Slide fitting	FB7000
4	Lock catch	FB7001
5	Bolt M10x20	BU1020/BU1200

	Part	Part. no.
6	Flange nut M10	MU1001/MU1010
7	End protection	PS1070
8	U-fitting M8x50	XY0850
9	Flange nut M8	MU0801/MU0805

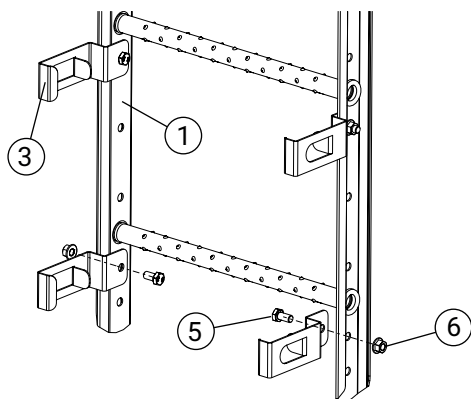


1. Installation of ladder fittings

Mount the ladder fittings (2) on the fixed ladder. (1)
At the bottom, fit 2 step fittings (2) of c / c 300mm.
Use 1 bolt + nut (5,6)/step fitting.

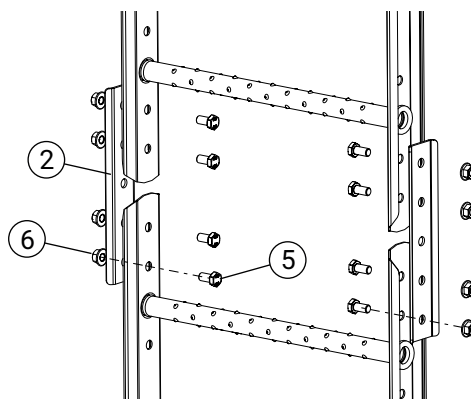


2. Joining ladders

Join the ladders using splice fittings (2) and 4 bolts + nuts (5,6)/side.

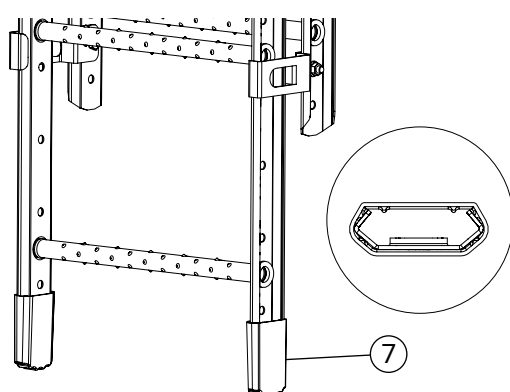

3. Installation of end protection

Turn the end protection (7) in the right direction, press or tap firmly with a rubber mallet.

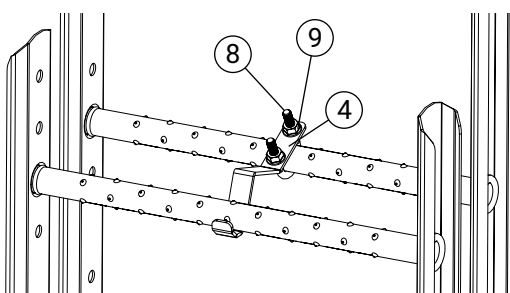

4. Check the overlap

In the dropped position, the ladders must overlap each other.

5. Installation of step holders

Fit step holders (4) using the U-fitting + nut (8,9) and hook the ladder into place..

