


	Part	Part no.
1	Adjustable foot	EU0150
2	Support leg	EU1000
3	Railing post	EU1100
4	Support beam	EU0610/EU0910/ EU1210
5	Bolt M10x60	BU1601


	Part	Part no.
6	Slit type plank flooring	EU1231/EU2431
7	Railing tube	RR2723
8	Top part, slit type plank flooring	EU1601
9	Self-drilling screw 5,5x100	SS5510
10	Tube bend	RR2790

	Part	Part no.
11	Flange nut M10	MU1001/MU1010
12	Plastic cover	PL4545
13	Joint slit plant	EU0330
14	OPTI sealing plate	TP3645
15	Self-drilling screw 5,5x22	SS5221/SS5225
16	Hinge half	GJ3401

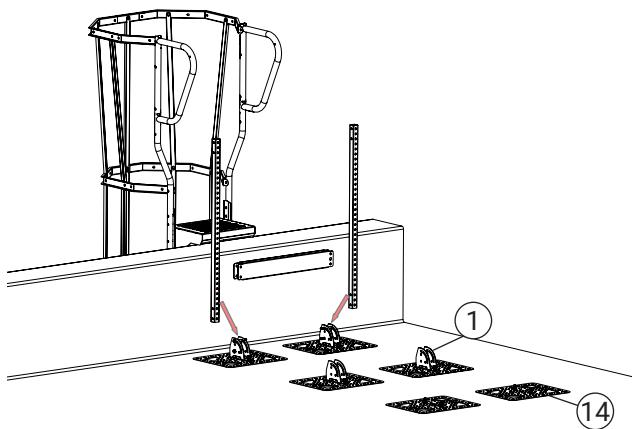


### 1. Installation

Measure and place brackets (14) and adjustable feet (1).

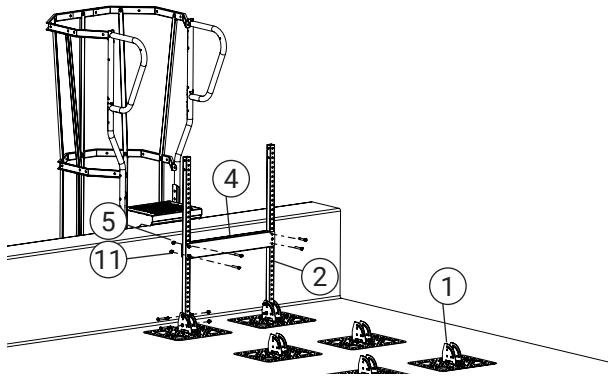


### 2. Installation of support beams and adjustable feet

Install the lower foot (1). The adjustable feet are adjustable up to a 45° inclination. Adjust the support leg (2) so that it is vertical and the support beam (4) is horizontal. Screw the support leg in place with 2 bolts (5) and nuts (11).

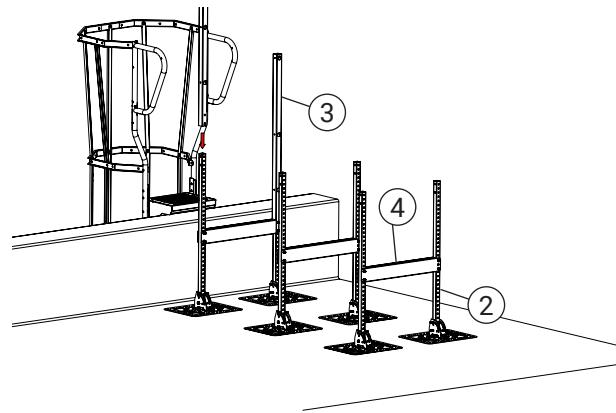


### 3. Installation of support beam and railing post

Install the support beam (4) and handrail post (3) to the support leg with 2 bolts and nuts. Cut the adjustable support leg (2) if it reaches higher than 610 mm above the support beam.

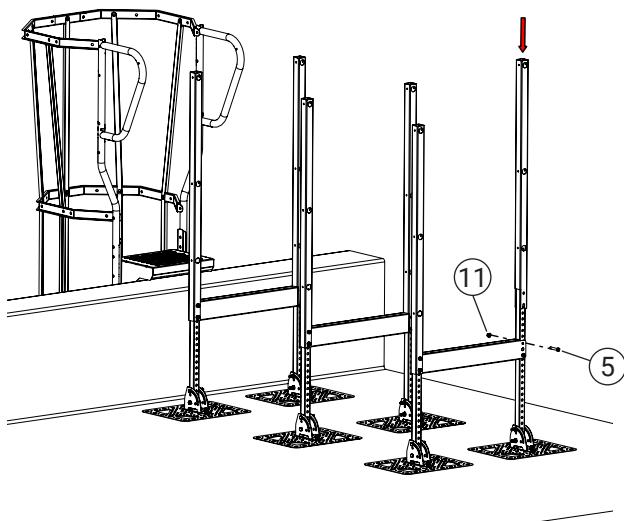


### 4. Installation of railing post



Remove the upper bolt (5) and loosen the lower bolt and nut. Place the post in place and tighten the bolts and nut.

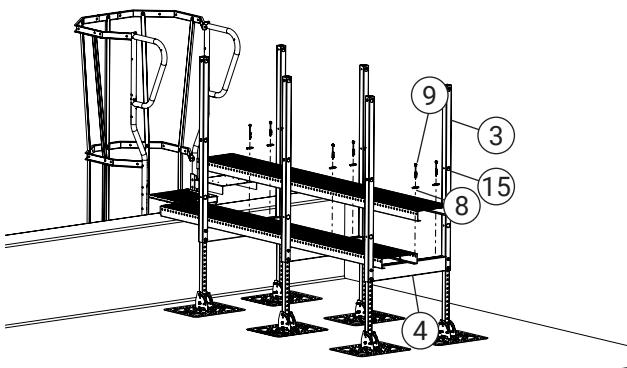**5. Installation of slit type plank flooring**

Installed from the railing post (3) and in. Screw the joint slit plant (13) into the standing plate with a self-drilling screw (15), screw the deck into the joint slit plant with 2 self-drilling screws (9) with the top part slit type plank flooring (8) per slit type plank flooring (6) and support beam (4). Approved overhang outside the support beam is a maximum of 300 mm.

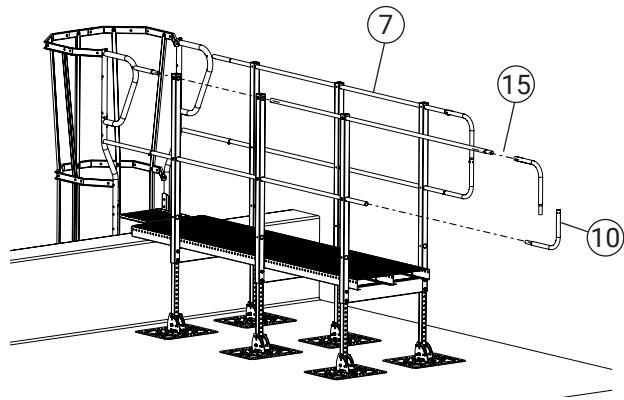**6. Installation of railing tubes with tube bends**

Attach the railing tube (7) to the railing post with a self-drilling screw (15). Install 2 tube bends to finish off the railing.

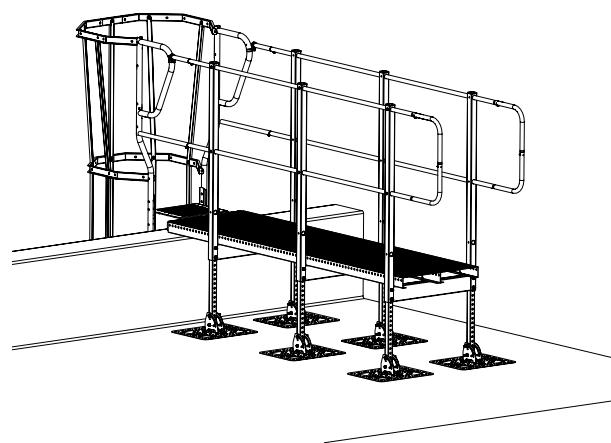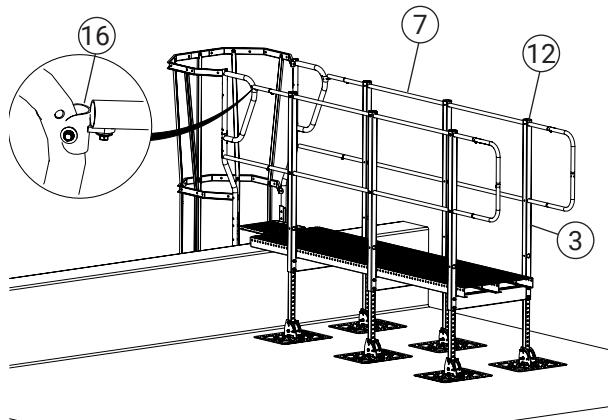**7. Installation in cat ladder**

Screw the railing into the railing post with self-drilling screws (15), screw tube bends into the railing post with self-drilling screws (15). The plastic cover (12) is pressed into the railing post (3) for protection.