


Access bridge, inclined

	Part	Part no.
1	Adjustable foot	EU0150
2	Support leg	EU1000
3	Railing post	EU1100
4	Support beam	EU0610/EU0910/ EU1210
5	Bolt M10x60	BU1601


	Part	Part no.
6	Slit type plank flooring	EU1231/EU2431
7	Railing tube	RR2723
8	Top part, slit type plank flooring	EU1601
9	Self-drilling screw 5,5x100	SS5510
10	Tube bend	RR2790

	Part	Part no.
11	Flange nut M10	MU1001/MU1010
12	Plastic cover	PL4545
13	Self-drilling screw 5,5x22	SS5221/SS5225
14	Joint slit plant	EU0330
15	OPTI sealing plate	TP3645
16	Hinge half	GJ3401

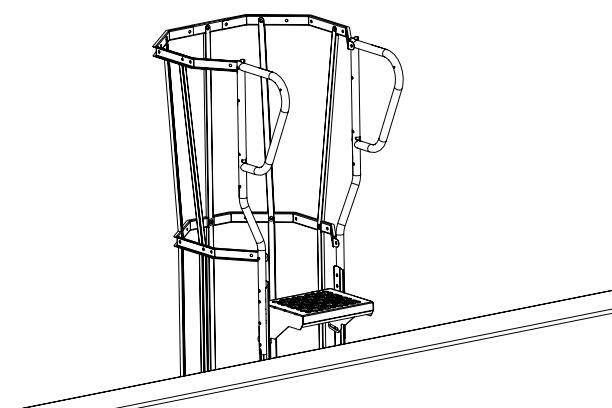


1. Installation cat ladder

Install the cat ladder on the wall.

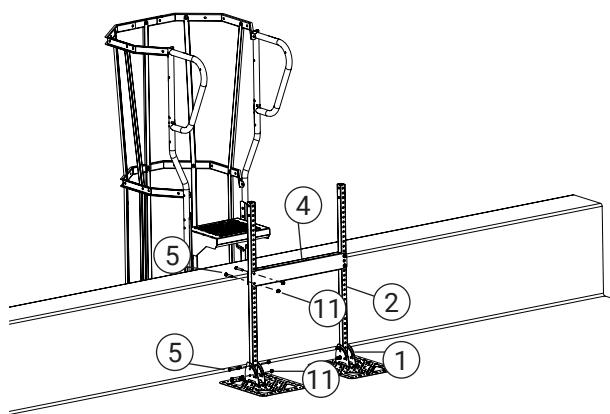


2. Installation of support beam and adjustable foot

Install the lower foot (1) which is adjustable up to 45° inclination. Install and adjust the support leg (2) so that it is vertical and that the support beam (4) is horizontal. Screw the support leg in place with bolt (5) and nut (11) into the adjustable foot, and with 2 bolts (5) and nuts (11) into the support beam.

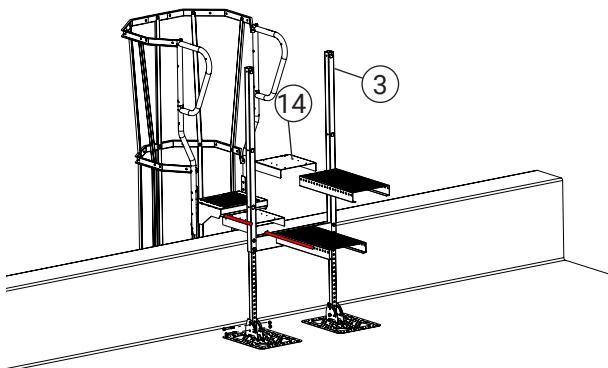


3. Installation of short slit type plank flooring

When installing the railing post (3), remove the upper bolt and loosen the lower bolt and nut, install the railing post and screw the bolts in. Screw the joint slit plant (14) into the stand plate with a self-drilling screw (13).

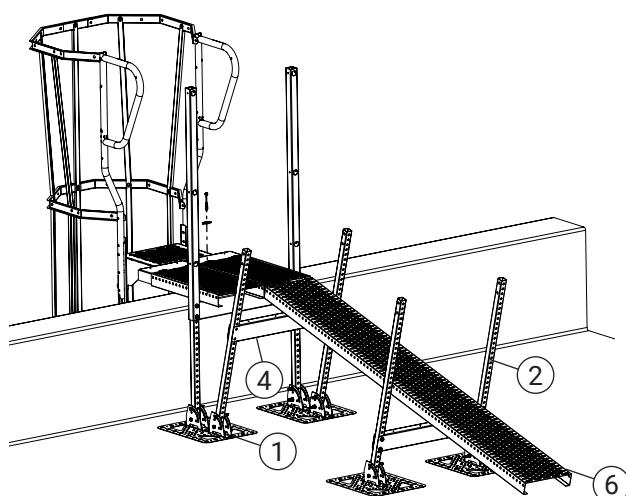


4. Installation of downward slit type plank flooring



Install the adjustable foot (1) at the appropriate distance. Lay out the slit type plank flooring (6), adjust the support beam (4) to the appropriate height and position them perpendicular to the support beam (4). Cut the adjustable support leg (2) if it reaches more than 610 mm above the support beam. Install the plank flooring into the joint slit plant.

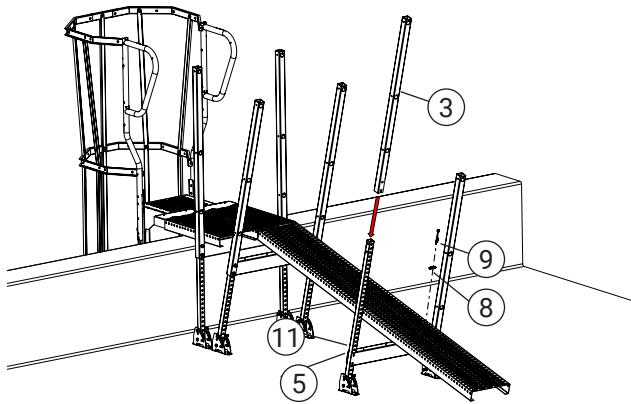**5. Installation of railing post**

Remove the upper bolt (5) and loosen the lower bolt and nut. Place the handrail post (3) in place and tighten the bolts and nut.

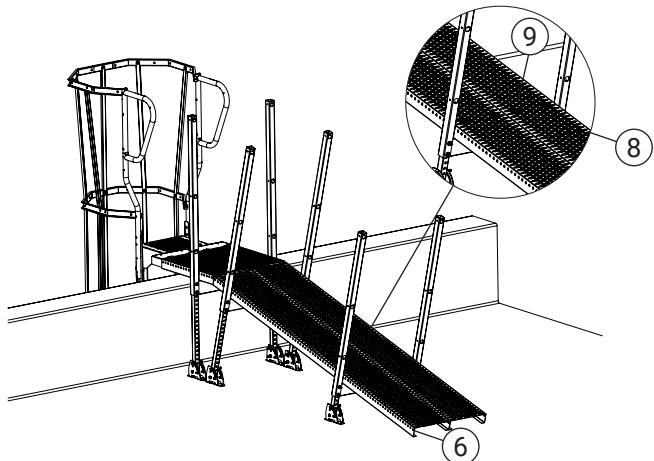**6. Installation of slit type plank flooring**

The slit type plank flooring (6) is attached with the top part slit type plank flooring (8) and self-drilling screw (9).

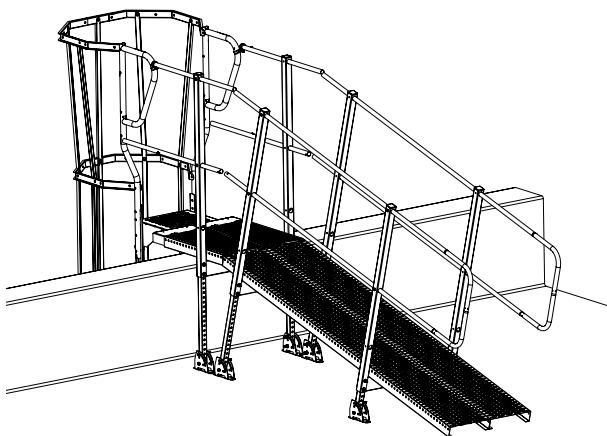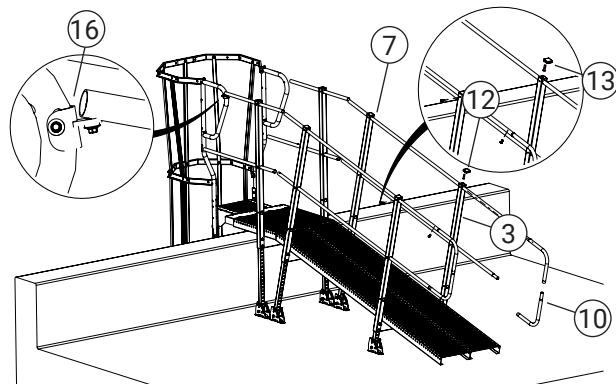**7. Installation of railing tubes and plastic covers**

Attach the railing tube (7) with a self-drilling screw (13) to the handrail post, mount with the hinge half (16) in the handrail arch. Mount 2 tube bends (10) to finish the handrail. Press the plastic cover (12) into the handrail post (3) as protection.