


Universal Railing L Support Bracket



Part	Part. no.
1 Railings	See table
2 Single bracket	UL1000
3 Double bracket	UL2000
4 Washer	UL4200
5 Bolt M10x20	BU1201/BU1200
6 Flange nut M10	MU1001/MU1010

Part	Part. no.
7 Kick strip	SL0410/SL0510/SL0710/SL1010/SL1510/SL2010
8 Self-drilling screw 5.5x22	SS5221/SS5225
9 Gull wing connection	MK4200
10 Tube coupling	KP4277

Works as L support max 100 mm

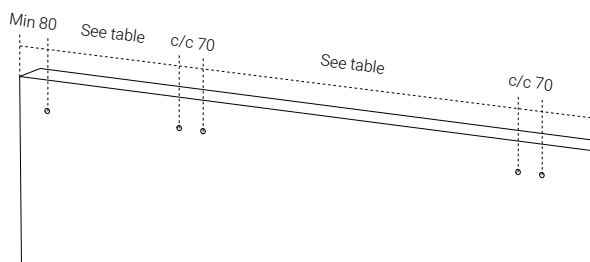

Single rail for double bracket	measurement c/c (mm)	Double rail for double bracket	measurement c/c (mm)
UI 2042/UB2042	1888	UI 2042/UB2042	1926
UI1542/UB1542	1388	UI1542 / UB1542	1426
UI1042/UB1042	888	UI1042 / UB1042	926
UI0742/UB0742	588	UI0742 / UB0742	626
UI0542/UB0542	388	UI0542/UB0542	426
UI0442/UB0442	288	UI0442/UB0442	326

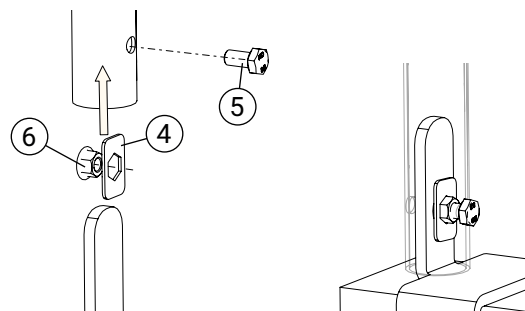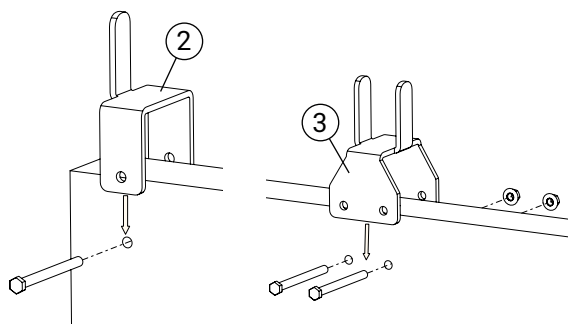


Installation of bracket

Screw bracket (2,3) using 1 or 2 M12 through screws per bracket.

NB Attachment bolt not included.


Installation of railing lock

Fit a nut (6) + lock washer (4) on a railing lock. Insert the railing tube and fit a bolt (5)

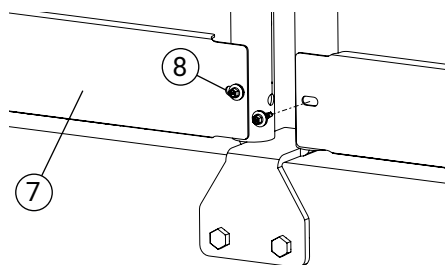

Installation of kick strip

Any kick strip (7) is to be fitted using 2 self-tapping screws (8).

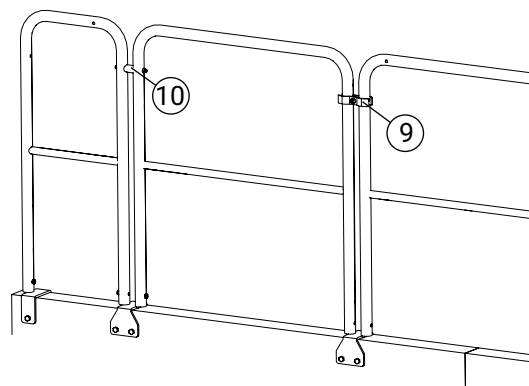

Installation of couplings

Install a gullwing coupling (9) or tube coupling (10) between the railings.