


Assemble the reinforcement from the back of the ladder. Make sure there is room above for any bracket, where applicable.

The reinforcement is placed over the safety cage's hoops.




The reinforcement is screwed in place with 5 nuts+bolts per section.

Ladder joints are bolted with 4 nuts+bolts per joint.

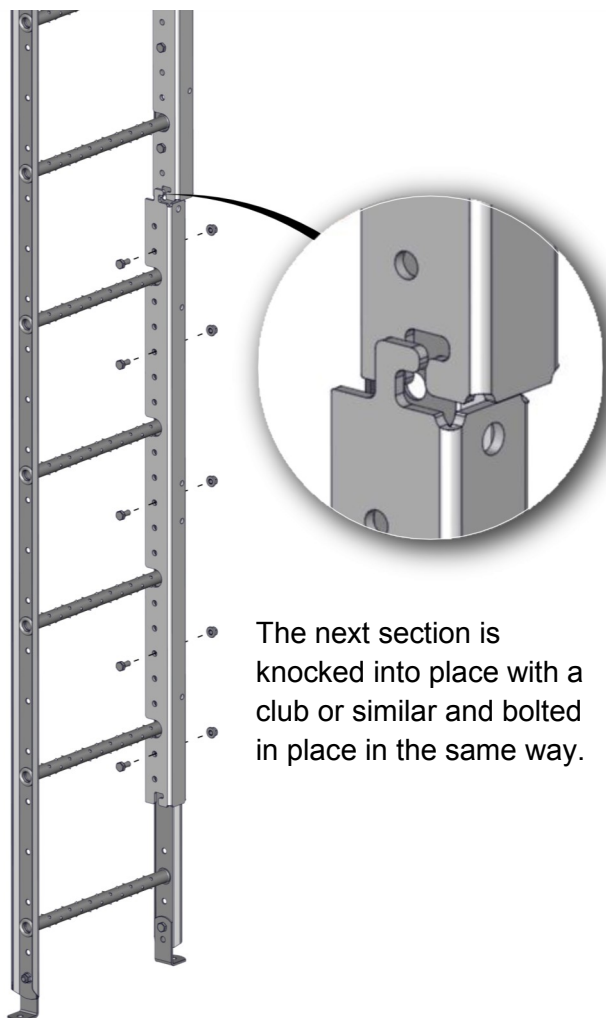

The next section is knocked into place with a club or similar and bolted in place in the same way.

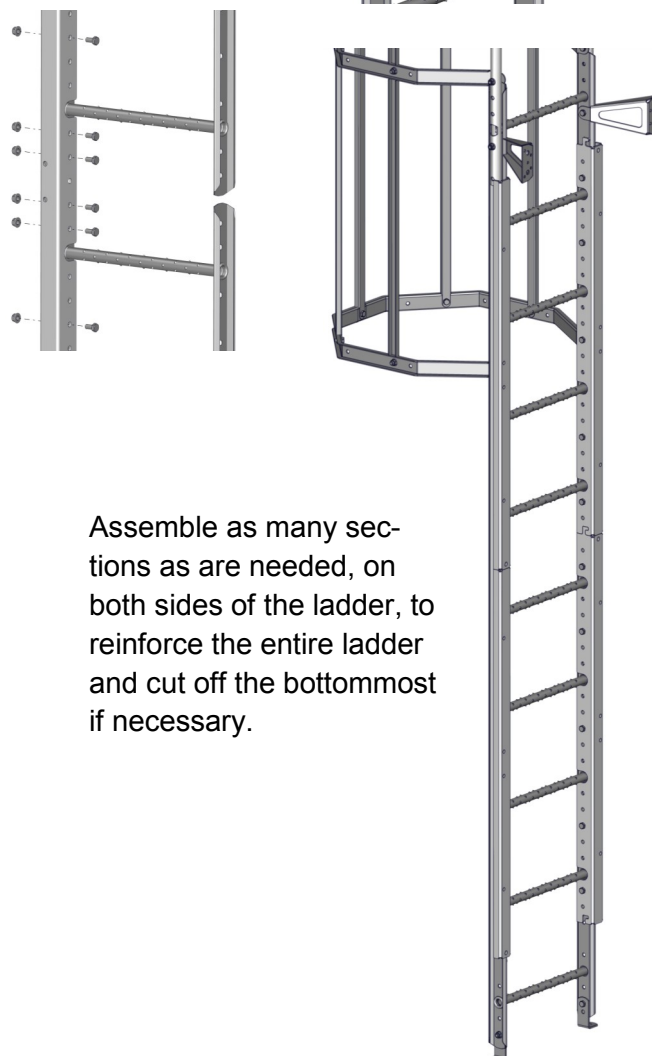

Assemble as many sections as are needed, on both sides of the ladder, to reinforce the entire ladder and cut off the bottommost if necessary.