


UNIVERSAL RAILING



WELAND STÅL AB

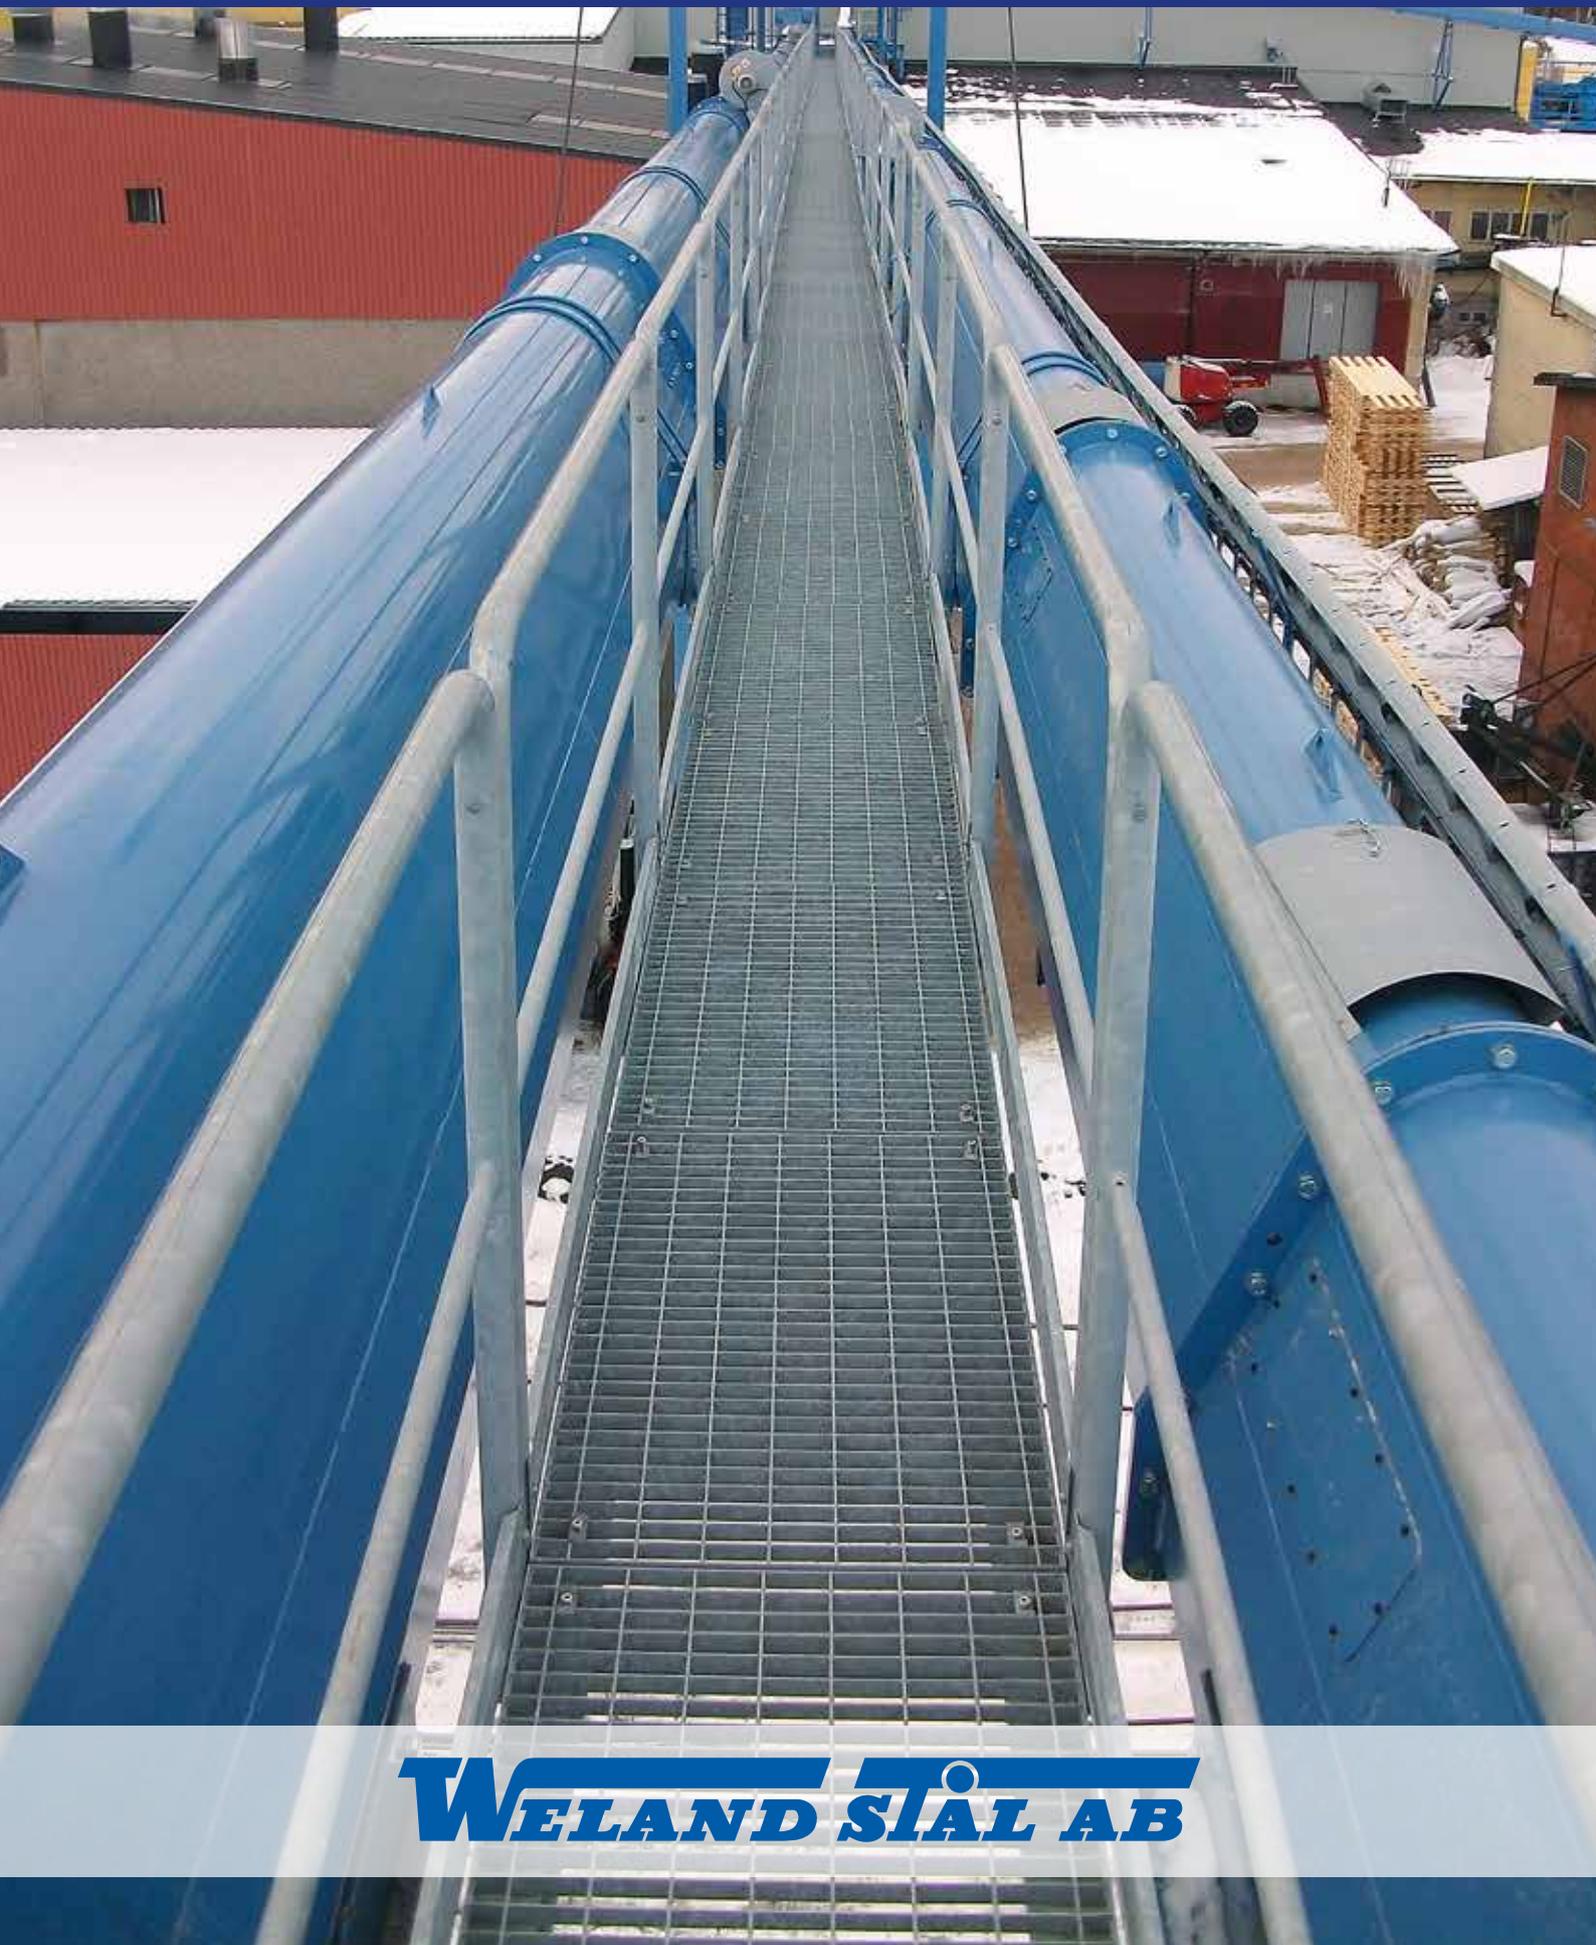

UNIVERSAL RAILINGS

Weland Stål's range of Universal railings has been around for many years. It is a versatile modular railing that is always kept in stock, providing our customers with a unique combination of price and delivery time.

The 1100 mm tall railing is available in two versions, Industrial with one intermediate rail and Childproof with intermediate balusters. All railings can be supplied with kick strips. With 6 different standard lengths in stock, combinations in any length at 100 mm intervals can easily be obtained. A newly developed joint connection means that the railing can be produced with exact dimensions without any welding during installation.



The railings are normally installed with side or floor brackets. In addition there is an external sleeve, internal pin and a concrete base that is used in the case of temporary barriers.



Corner sections, fishplate brackets, wall brackets, gates with a set of hinges and locks are also available for the railings. We can also produce special lengths with short delivery times.

All materials in hot dip galvanised version.

Please feel free to visit our website, www.welandstal.se, where you can easily create your own material specification, including prices, as well as obtain more detailed information.

6 different lengths provided increased flexibility!

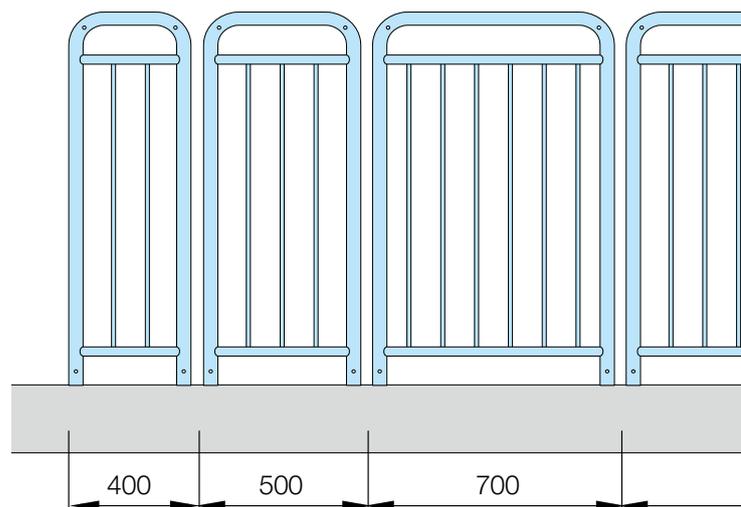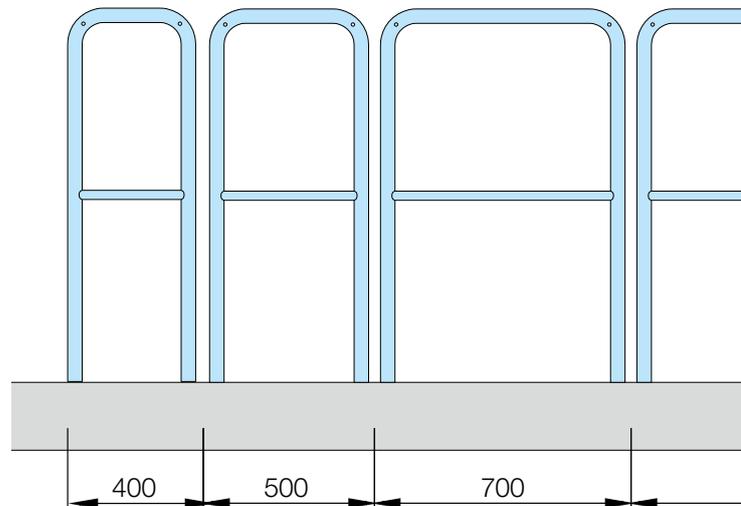

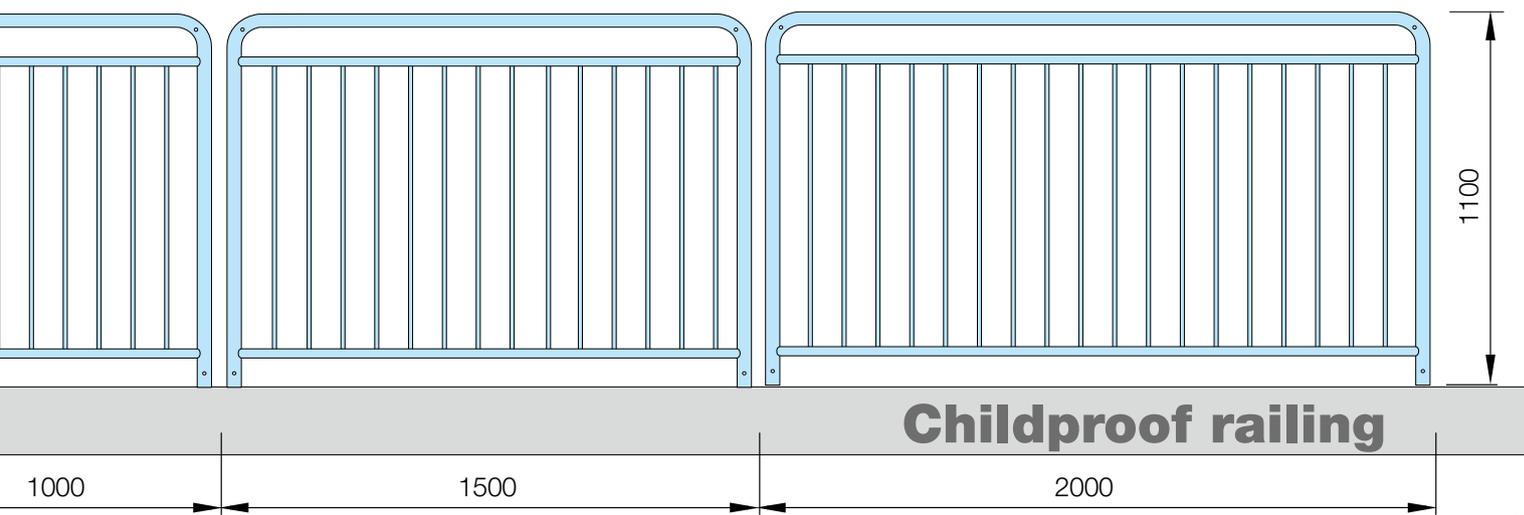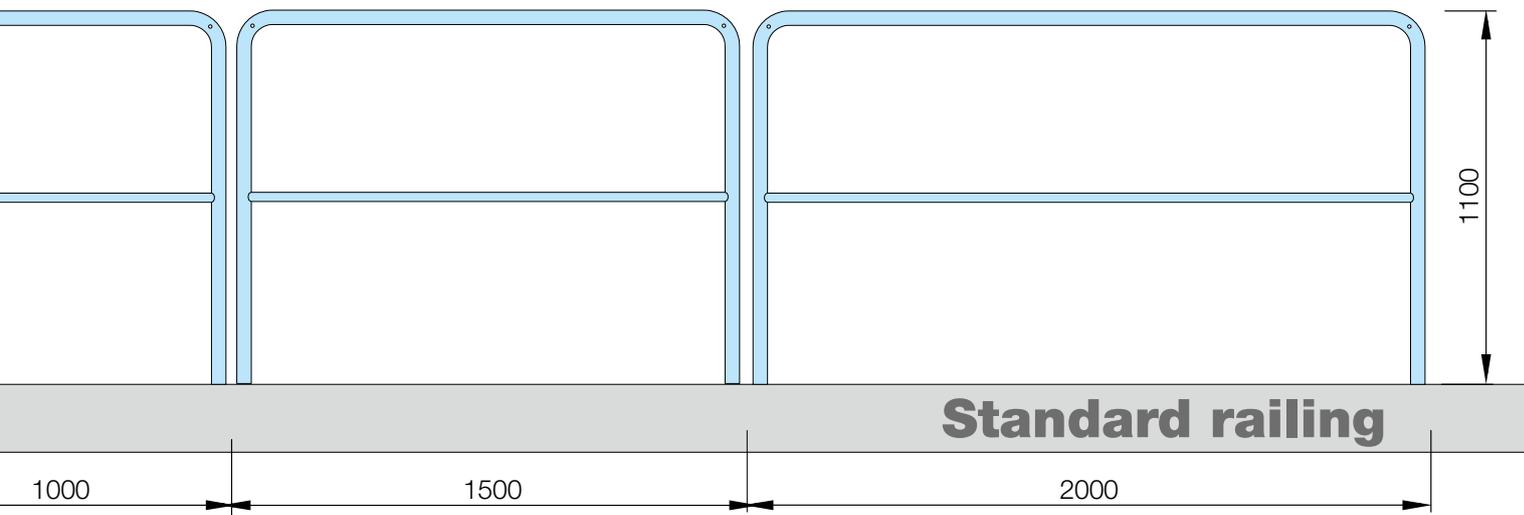





We can supply CAD files for our railings and components.



We now also stock corner sections measuring 400 x 400 mm. Available in standard and childproof versions. We also have a kick strip for the standard railing for internal and external installation.





The side brackets are available in right and left-hand versions, and floor brackets are available in single and double versions. These provide a simple, stable fixing and good vertical adjustment options.



For the gate, we have developed a hinge that is spring-loaded and hence self-closing. The gate may be max. 1000 mm wide, and for the locking function we have a box lock with fittings.

ORIGINAL RAILING

Working with short delivery times, we can manufacture railings with special dimensions and even railings bent at angles for use on staircases, slopes, etc. This applies both to standard and childproof railing types.

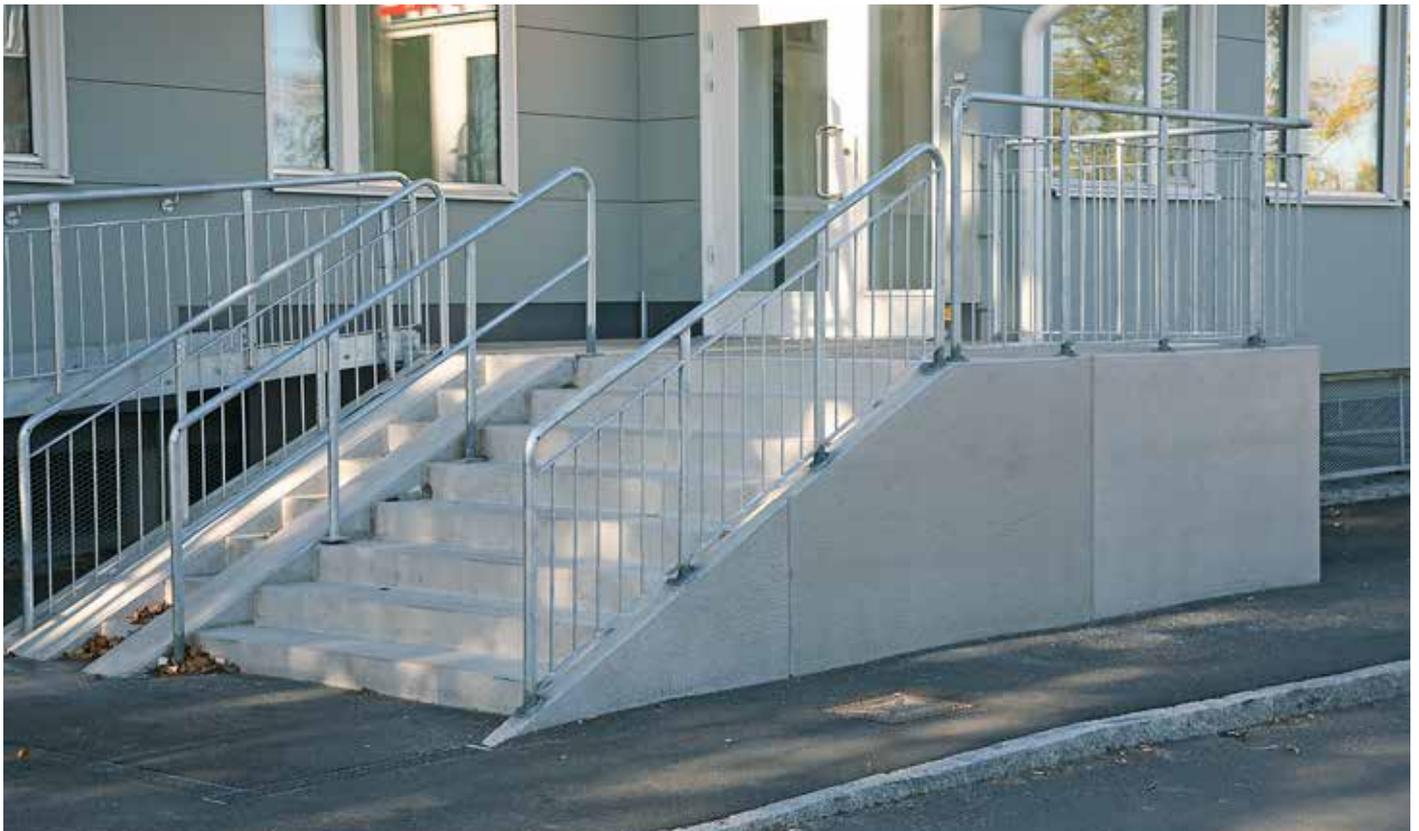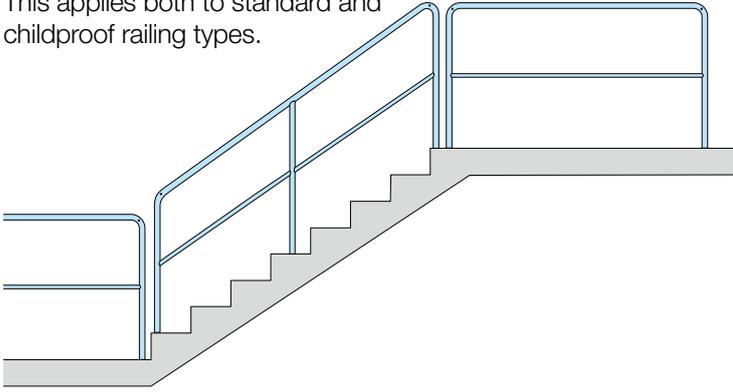



**New!
WeFlex
railing!**

WEFLEX RAILING

An entirely new system that has been developed for people who want to build the railing on site. This simple railing is suitable for use in industry to shield between different areas or levels. A flexible solution, particularly when some measurements have not been provided.

The railing comprises loose components that can easily be screwed together during installation. Handrails and posts made of 42 mm tubes and intermediate rails made of 27 mm tubes. The railing is secured to the side or on the floor using the same mounts that are used for the Universal railing. The distance between the posts can be varied by up to max. 1500 mm, depending on the load requirements. The railing posts have laser-cut stops for handrail mounts and holes for intermediate rails. The handrail is placed on top of the post and secured with a lock plate. The intermediate rail is pushed into the post.

The difference compared to the Universal railing is that WeFlex forms a “continuous”, unbroken railing in the length and version you want. A wide range of accessories are held in stock, such as fixing components, hooks, joining devices, kick strips, etc. This means that delivery times are kept short, while the flexible system also allows short installation times.



Other railing types can be found in Weland's **PRODUCT MANUAL**



The product manual may be ordered free of charge!

WELAND STÅL AB

Weland Stål AB • Industrivägen 1 • 523 90 Ulricehamn
Tel. +46 (0)321-261 60 • Fax +46 (0)321-167 10
E-mail: info@welandstal.se • Internet: www.welandstal.se

Weland Stål AB reserves the right to make design changes. Reproduction is prohibited.